





PRODUCT FEATURES:

- Optical design, greatly improved the light utilization and evenness.
- ❖ High efficiency LED Driver, voltage AC120-277.
- Cast Aluminum design, better cooling, light quality, LED Tj < 85 $^{\circ}$ C.
- Excellent efficacy ≥ 120Im/w.

MODEL #	
PROJECT:	
NOTES:	
DATE:	
PREPARED BY:	

Additional Information:

o Power: 60W

o Input: AC 120-277V

o CCT: 4000K/5000K

Output: 7792 LM

o Light Source:SMD 2835 LEDs

o Driver: WELED POWER


















PRODUCT APPLICATIONS:

The Round Post Top LED Lighting Series can be widely used for Outdoor (Wet Location) Excellent for Lawns, Courtyards, Roadways and many other applications.

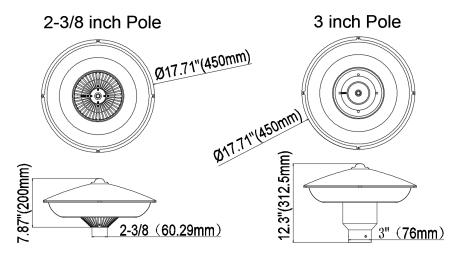

Structure Features:

Shell Materials: Aluminum & PC

Finish: Dark Bronze/White/black(Option)

Net Weight: 5.13KG (11.3 LBS)

Product Size: 450mm*200mm

O Carton Size: 455mm*455mm*240mm





ROUND POST TOP LIGHT


TECHNICAL PARAMETERS:

Туре	WSD-RPT06W27-XXK-Z-U					
Power	60W	Lighting Angle	101°			
Input V oltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs			
PF	>0.98	Working Life	>75000 hrs			
Driver Efficiency	>90%	Working Temperature	-30 - +45℃			
Luminous Flux	7792 Lm	Storage Temperature	-40 -+80℃			
Color Temperature	4000K/5000K	Protection Level Wet Location				
CRI	Ra>70	Cable 3core,18AWG (0.5r				

PHOTOMETRY:







ORDERING EXAMPLE: WSD-RPT06W27-XXK-Z 【D,W,B,S】 -U 【12,13】

WSD	RPT	06W	27	ххк	Z	U
Company	Product	Power	Voltage	ColorTemp	FINISH	Mounting Mean
WISDOM	RPT Round Post Top Light	06W (60W)	27 AC120-277V	40K (4000K) 50K (5000K) ± 500K	D (Dark Bronze) W (White) B (Black) S (Silvery)	I2 2.5-inch adapter I3 3-inch adapter